


INTRODUCTORY OFFER!

# Systemised Marking

## Individual, accurate conductor identification

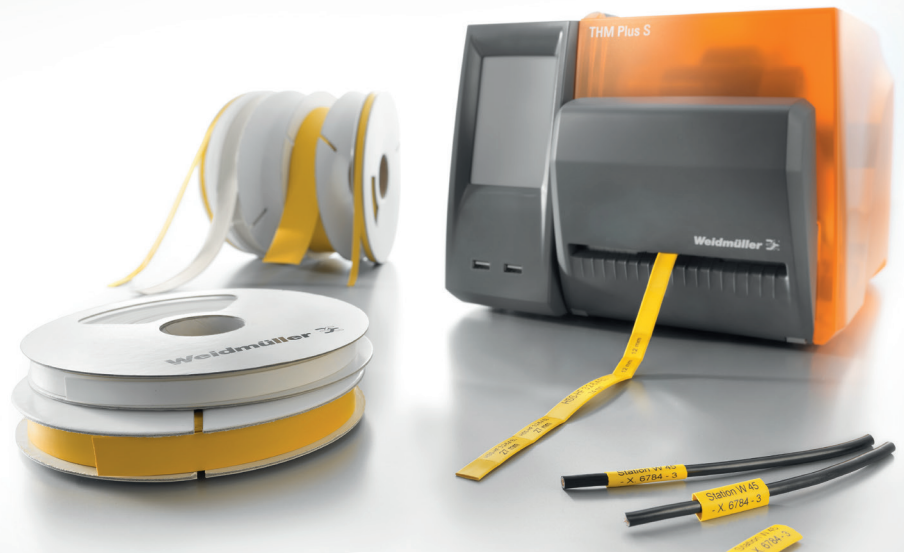

Let's connect.

**NEW**



The complete and unbeatable package for industrial labelling!



**\$ 1950.00 + \$195.00 GST**

### THM Plus S thermal transfer printer

#### Label printing with optional cutting and perforation.

The THM Plus S is a thermal transfer printer with a sturdy, modular construction. It's key advantage is in the processing of continuous materials, fabric and polyester labels, shrink sleeves and PLC labels. The integrated cutting and perforating options allows the division of the continuous material into any length – this makes work easier when cutting and finding the identification areas. The device is very simple to operate thanks to the coherent status display and intuitive touch display.

Save money with the addition of a perforation cutter and ink ribbon. Place your order while the special offer lasts.

**Order number: 1455690000**

#### The package contains:

##### 1. THM Plus S

THM Plus S thermal transfer printer is the ideal solution for space saving markers for the electrical cabinet. The TwinMark endless heat-shrinkable sleeves are printed and perforated in a matter of seconds.

##### 2. Perforation cutter

The marker is set to the desired length using the software M-Print® PRO, the cutter ensures ease of separation.

##### 3. Ink ribbon

We offer an ink ribbon developed specifically for this purpose.

[www.weidmuller.com.au](http://www.weidmuller.com.au)

**Weidmüller** 

# TwinMark endless heat-shrinkable sleeves

## Individual, accurate wire identification

### THM Plus S printer.

The ideal solution for printing labels and shrink-fit tubes: the touch display and the centered roll make handling easy.

### Convenient assembly

You can use our software to set the required length of the marker. The tube is perforated by the printer at the required position to allow easy separation.

### Space saving on the conductor

The marker is easily slipped on to the conductor and then simply sits there firmly and securely. An optimum fit is achieved with a 2-to-1 shrink rate.

### Large diameter range

The large range covers conductor diameters from 1.2 mm to 25.4 mm. The standard colours are white and yellow. Other customised colour variants are available on request.

### Time-saving installation

Due to the oval cross-section, only a slight lateral pressure is required to slip the tube easily onto the conductor.



Remove the clutter from your cabinets and make installation and maintenance easier – our solution for space-saving conductor identification provides you with a cost-effective process right from the start. Let's connect.

### Technical specifications

Type	
Material	Polyolefin, halogen-free
Shrinkage rate	2:1
Shrinking temperature	>90°C
Temperature range	-30°C...+105°C
Fire class	ASTM D 635-HB
Oxygen index (EN ISO 4589-2)	36%
Tested acc. to	DIN 5510-2 Annex C (toxicity) DIN 5510-2 drip class ST2 BS 6853-D.8.3, vehicle class II UNI CEI 11170-3 class LR4 CEN/TS 45545-2 class HL3
Description	
HSS	Heat Shrinkable Sleeve
HF	Halogen-free
1.2-2.4mm	For wire diameter
EL	Endless
Y	Y - Yellow W - White

### Ordering data for ink ribbon

Type	Colour	Ribbon width	Length per reel	Order No.
HSS HF EL 40/300	Black	40 mm	300 m	1426210000

### Ordering data for heat-shrinkable sleeves on roll

Type	Colour	Wire diameter	Cond. cross-section	Sleeve width	Length per reel	Order No.
HSS-HF 1.2-2.4 EL Y	Yellow	1.2 - 2.4 mm	0.25 - 0.5 mm <sup>2</sup>	4.2 mm	13 m	1423220000
HSS-HF 1.6-3.2 EL Y	Yellow	1.6 - 3.2 mm	0.5 - 1.5 mm <sup>2</sup>	5.6 mm	13 m	1423230000
HSS-HF 2.4-4.8 EL Y	Yellow	2.4 - 4.8 mm	0.75 - 4 mm <sup>2</sup>	7.6 mm	13 m	1423240000
HSS-HF 3.2-6.4 EL Y	Yellow	3.2 - 6.4 mm	1.5 - 6 mm <sup>2</sup>	10.7 mm	13 m	1423250000
HSS-HF 4.8-9.5 EL Y	Yellow	4.8 - 9.5 mm	4.0 - 16 mm <sup>2</sup>	15.1 mm	13 m	1423260000
HSS-HF 6.4-12.7 EL Y	Yellow	6.4 - 12.7 mm	6.0 - 35.0 mm <sup>2</sup>	20.9 mm	13 m	1423270000
HSS-HF 9.5-19.1 EL Y	Yellow	9.5 - 19.1 mm	16.0 - 70.0 mm <sup>2</sup>	30.9 mm	10 m	1423280000
HSS-HF 12.7-25.4 EL Y	Yellow	12.7 - 25.4 mm	35.0 - 120.0 mm <sup>2</sup>	40.5 mm	10 m	1423290000
HSS-HF 1.2-2.4 EL W	White	1.2 - 2.4 mm	0.25 - 0.5 mm <sup>2</sup>	4.2 mm	13 m	1423330000
HSS-HF 1.6-3.2 EL W	White	1.6 - 3.2 mm	0.5 - 1.5 mm <sup>2</sup>	5.6 mm	13 m	1423340000
HSS-HF 2.4-4.8 EL W	White	2.4 - 4.8 mm	0.75 - 4 mm <sup>2</sup>	7.6 mm	13 m	1423350000
HSS-HF 3.2-6.4 EL W	White	3.2 - 6.4 mm	1.5 - 6 mm <sup>2</sup>	10.7 mm	13 m	1423360000
HSS-HF 4.8-9.5 EL W	White	4.8 - 9.5 mm	4.0 - 16 mm <sup>2</sup>	15.1 mm	13 m	1423370000
HSS-HF 6.4-12.7 EL W	White	6.4 - 12.7 mm	6.0 - 35.0 mm <sup>2</sup>	20.9 mm	13 m	1423380000
HSS-HF 9.5-19.1 EL W	White	9.5 - 19.1 mm	16.0 - 70.0 mm <sup>2</sup>	30.9 mm	10 m	1423390000
HSS-HF 12.7-25.4 EL W	White	12.7 - 25.4 mm	35.0 - 120.0 mm <sup>2</sup>	40.5 mm	10 m	1423410000

Note: Special offer valid until 31<sup>st</sup> March 2014